



Acoustic cabinet fans

CAB Series

Serial CAB

CAB-150 *230V 50/60* R6

Acoustic cabinet fans manufactured from heavy gauge galvanised steel sheet and internally lined with 50 mm thickness of fireproof acoustic insulation (M0). Fan cover supplied with "quick-fix" fixings to enable fast removal and fitting, and a tight close. All models incorporate single phase direct-drive forward curved centrifugal fan. All fans installed in acoustic cabinet fans CAB comply with the efficiency requirements of the ErP Directive.

All cabinets can be installed outdoors as standard.

Available, depending upon the model, with single motors in 2 or 4 poles.

Motors

- From CAB-100 to CAB-250N, motors are IP44, class B with ball bearings and thermal protection.

- CAB-315 RE model is fitted with an IP44 class F motor with ball bearings and thermal protection.

- CAB-355 RE and 400 RE models are fitted with an IP55 class F motor with ball bearings and thermal protection.

Electrical supply:

Single-phase 230V 50/60Hz from CAB-100 to 160

Single-phase 230V 50Hz from CAB-200 to 400 RE

Speed controllable using voltage regulation.

Working temperature from -20°C to +40°C.



Technical data


Acoustic characteristics

Unfortunately an error occurred.

Technical characteristics

Unfortunately an error occurred.

Curves

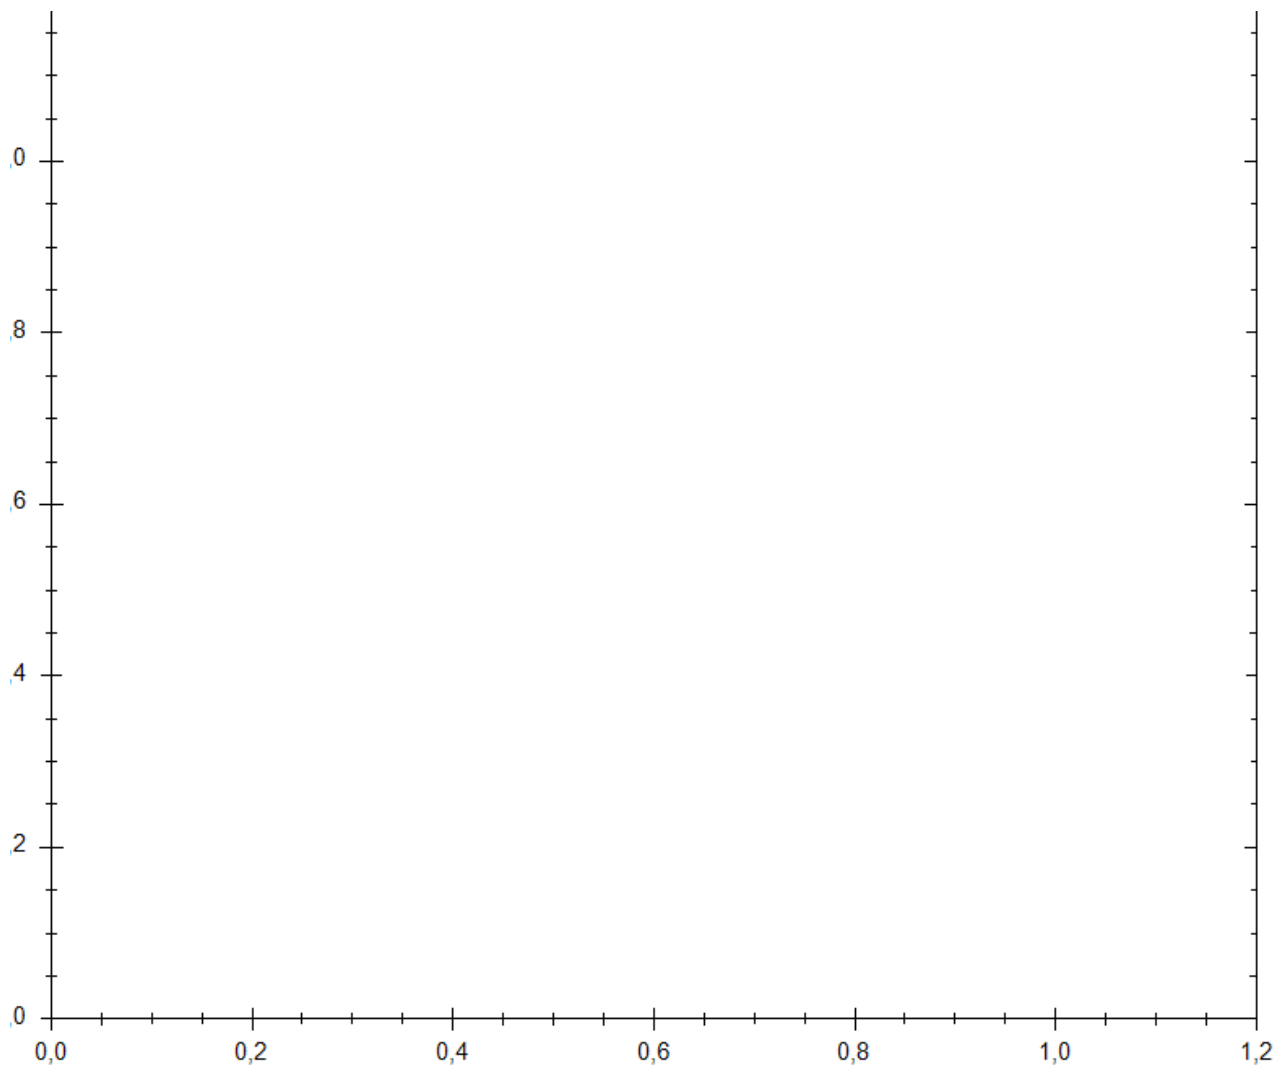

Dimensions

Unfortunately an error occurred.

ErP Information

Unfortunately an error occurred.