



## Centrifugal Single Inlet Fans CHMT Series

### Serial CHMT

#### CHMT/4-315/130 2,2KW (230/400V50HZ)LG VE

Range of single inlet direct drive centrifugal fans designed for smoke extraction in fire conditions and certified F400-120 (CE marked).

All casings are manufactured from electro-welded sheet steel protected against corrosion by grey epoxy-polyester paint coating.

All models incorporate forward curved centrifugal impellers manufactured from galvanised sheet steel.

Available, depending upon the model, with single or three phase motors in 4 or 6 poles.

#### Motors

All motors are IP55, class H.

Electrical supply:

-Three phase 230/400V-50Hz up to 3kW.

-Three phase 400V-50Hz, for higher power motors.

(See characteristics chart).

#### Additional information

The scroll can be orientated in 8 different positions as per the table below.

Standard supplied position: LG 270.

#### On request

Fan supplied in RD positions.

Fan fitted with 2-speed motor.



## Technical data


### Acoustic characteristics

Unfortunately an error occurred.

### Technical characteristics

Unfortunately an error occurred.


### Curves

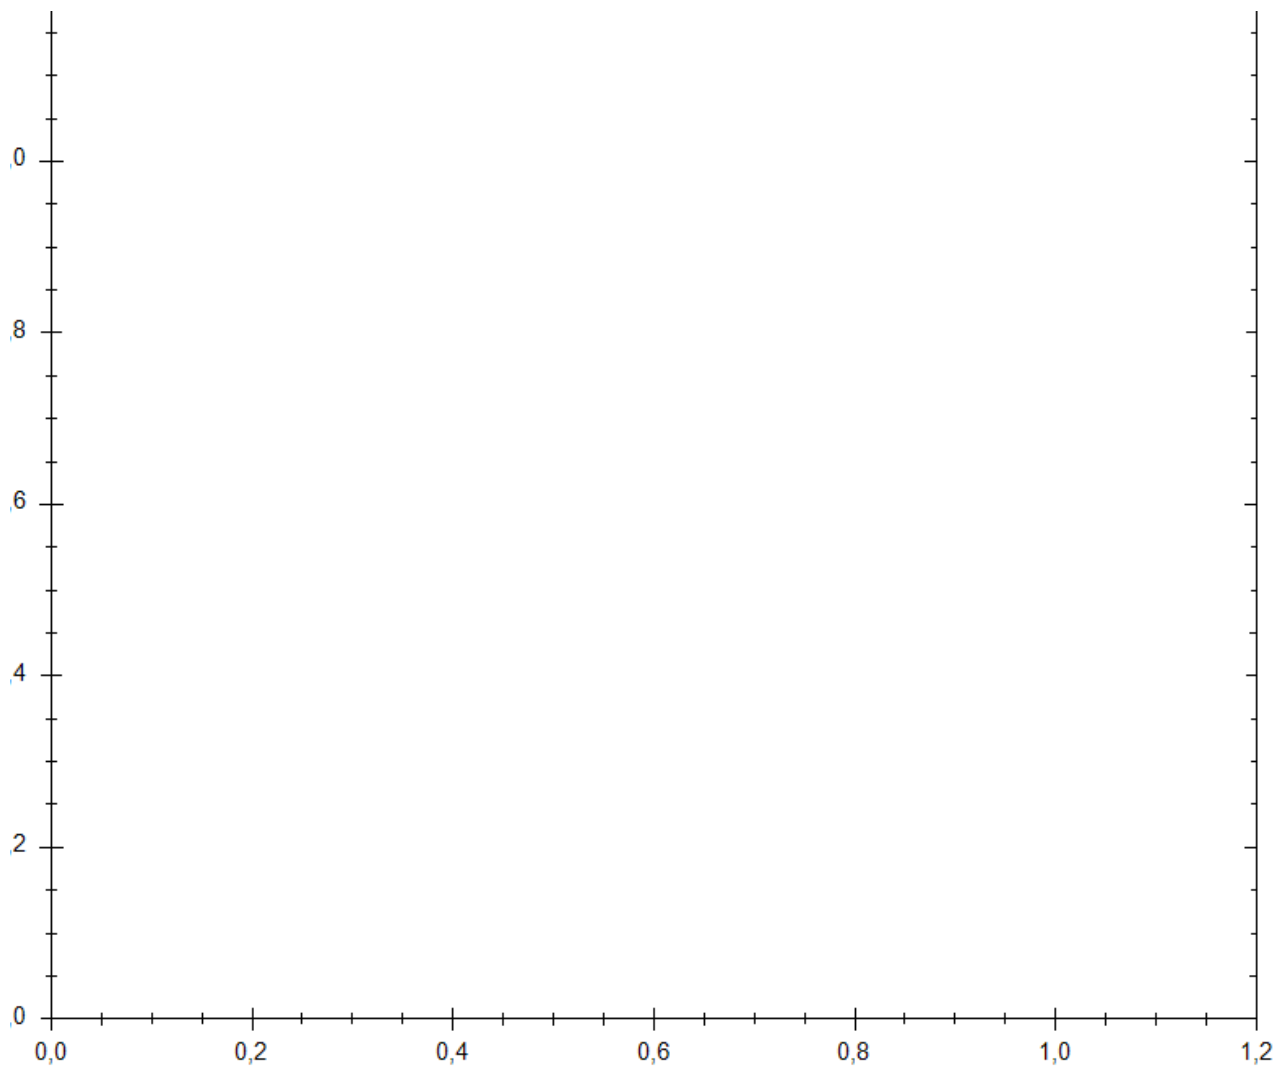

## Dimensions

Unfortunately an error occured.

## Orientation

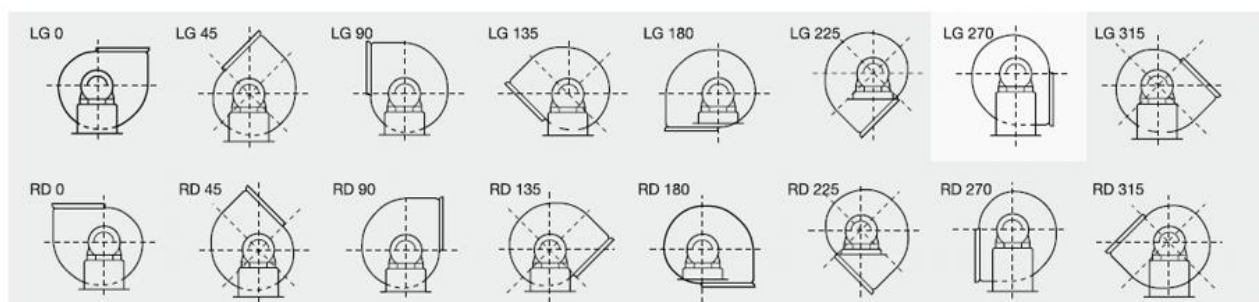

Standard position: LG 270. Special versions are supplied under request.

## ErP Information

Unfortunately an error occured.

