



Cooker hoods and kitchen fittings

REMOTE EXTRACTION

Serial EXTRACCIÓN REMOTA

TD 800/200 N

Through many years of experience in dealing with kitchen extract systems S&P are able to offer a new concept that replaces the traditional cooker hood unit:

The Remote Extraction.

This new design has a double aim:

1. To move the extractor further away from cooking area and therefore lowering the ambient noise radiated.
2. To achieve a higher smoke, grease and vapour extract rate.

By installing a canopy hood, with filter and controls, along with a remote mounted duct fan provides enormous flexibility of installation.

Mixed flow in-line fan, type TD-800/200 N with an airflow performance of 890 m³/h, 3-speeds, controllable from the cooker hood and designed to be installed at any point of the duct.




Technical data

Technical characteristics


Model	Airflow at free discharge (m ³ /h)	Diameter discharge tube (mm)	Voltage (V)	Power (W)	Sound pressure level (dB (A))
TD-800/200N 3V	890 / 750 / 660	200	230	103 / 93 / 88	38 / 34 / 31

Installation

IN-LINE FAN SYSTEM

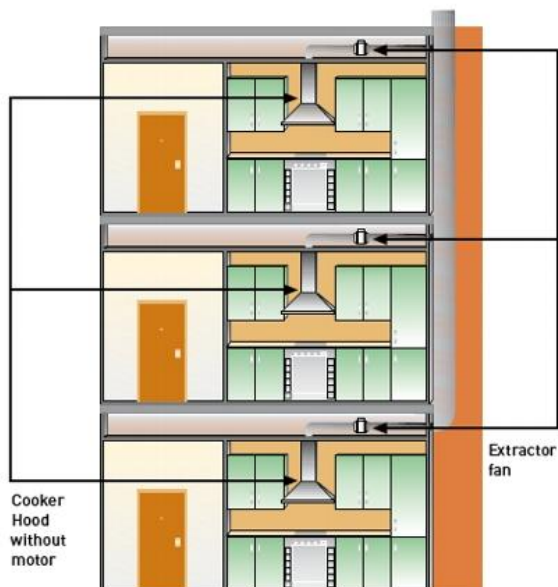

By installing a canopy hood, with filter and controls, along with a remote mounted duct fan provides enormous flexibility of installation.

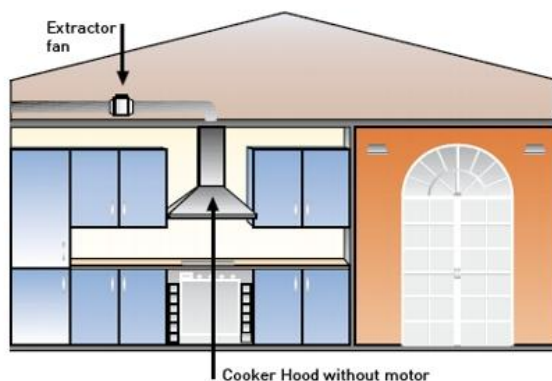

TD-800/200N

Mixed flow in-line fan, type TD-800/200 N with an airflow performance of 800 m³/h. Speed controllable from the cooker hood and designed to be installed at any point of the duct.