



Counter-flow, high-efficiency heat recovery unit IDEO2 325 ECOWATT

Serial IDEO 325 ECOWATT

IDEO2 325-ECOWATT

Whole house heat recovery unit with a high-efficiency heat exchanger up to 92% with constant airflow setting, very low consumption EC motor and low sound level. Provides a constant supply of fresh tempered air into the living spaces of a home whilst extracting condensation, smells and smoke from kitchens, bathrooms and toilets. The central unit is completed with extraction outlets located in different rooms (kitchen, toilets, bathroom) and inlets located in the main rooms (dining room, bedrooms).

Features

- 2 constant flow fans.
- Counter-flow heat exchanger with up to 92% performance.
- Wireless remote control.
- Wireless kitchen boost.
- F5 inlet filter with G4 pre-filter.
- G4 extraction filter.
- 100% summer by-pass option for free cooling.
- 4 nozzles, \varnothing 150/160 mm.
- 1 drain for vertical fitting.
- 1 antenna with potential transmission/reception range of 150 metres in an open space.
- 1 wall bracket.
- Air tight construction.



Technical data



Acoustic characteristics

Unfortunately an error occurred.

Technical characteristics

Unfortunately an error occurred.


Curves

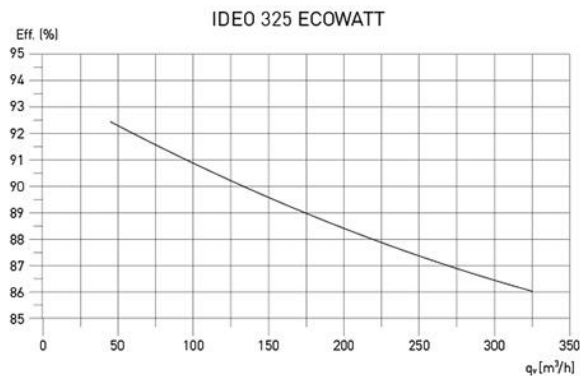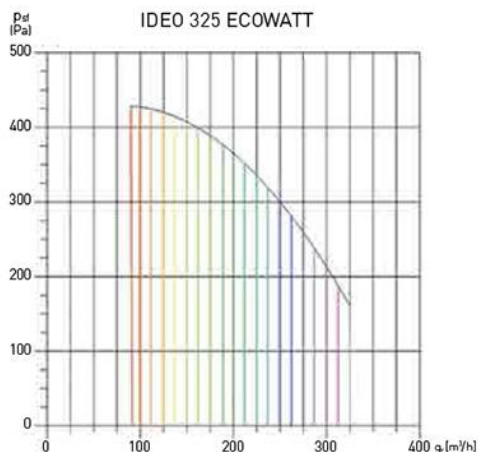


Dimensions

Unfortunately an error occurred.

Fitting

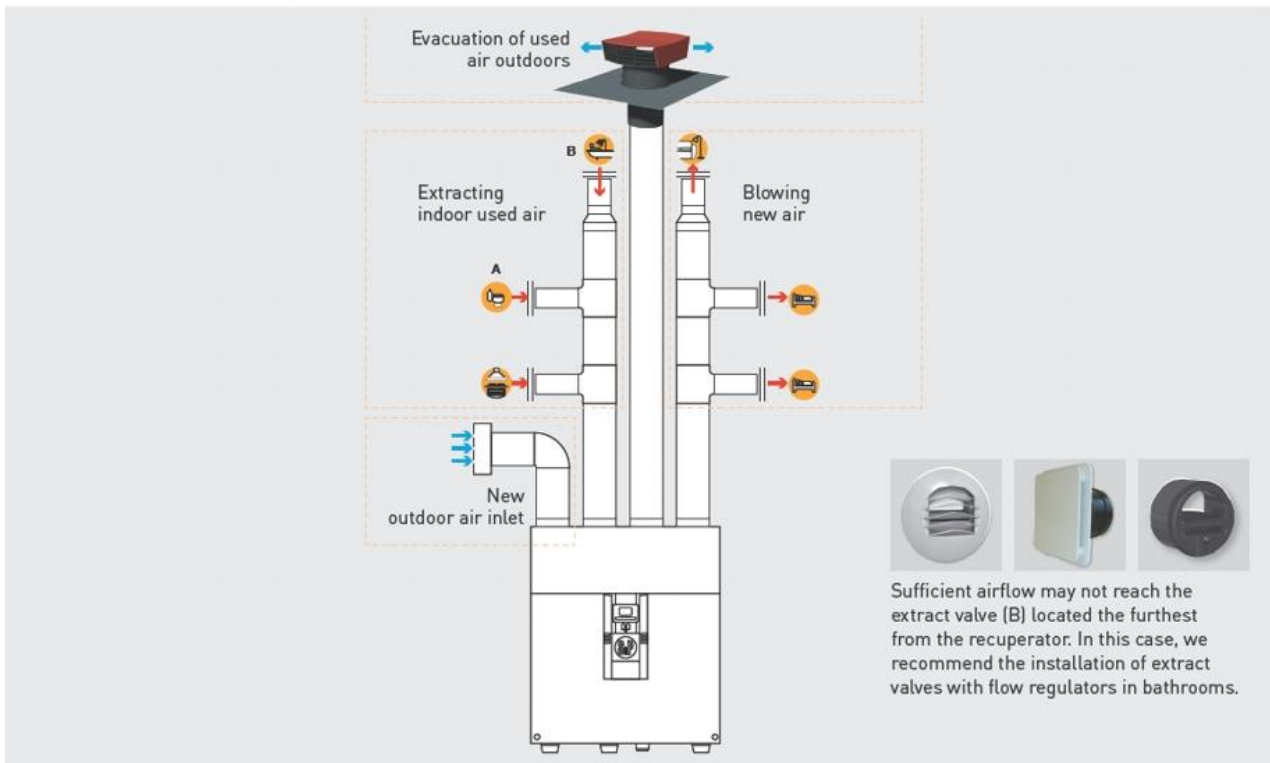


Installation

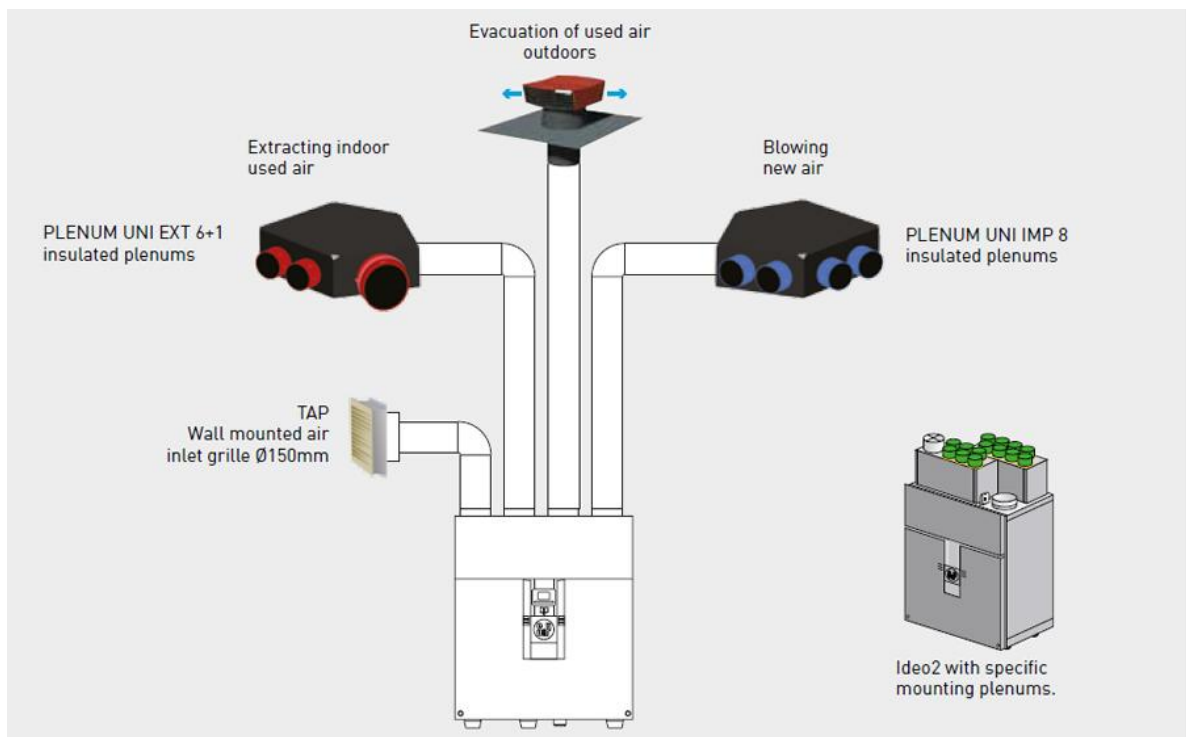

Heat recovery examples

EXAMPLE OF HEAT RECOVERY IN WINTER

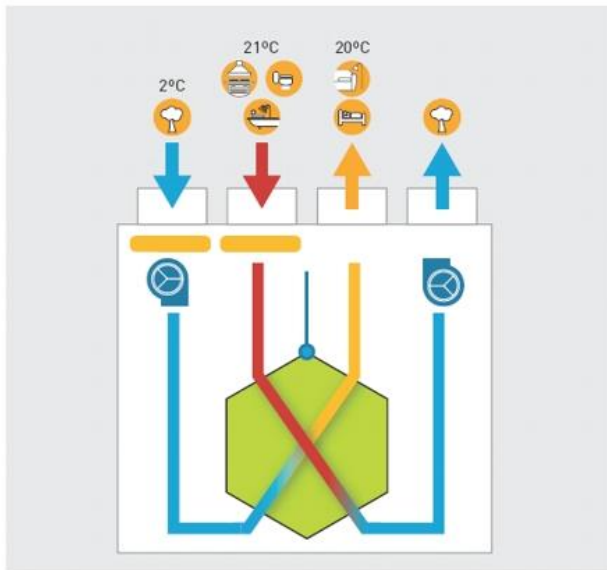


Operation without bypass

- Air inside home: 21°C.
- Outdoor air: 2°C.
- New air heated and blown into home: 19°C.

With a mechanical extract ventilation system, the new air would enter at 2°C through the air inlets, decreasing the temperature inside home. With the energy recovery ventilation systems, the new air would enter at 19°C.

EXAMPLE OF HEAT RECOVERY IN SUMMER NIGHTS (FREE COOLING)

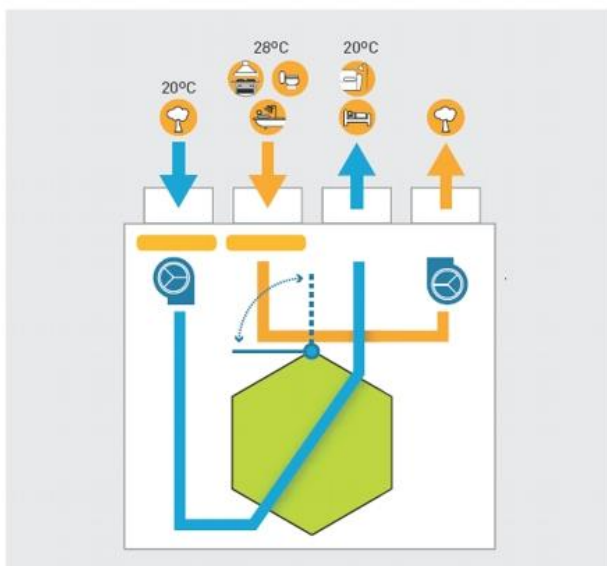


Operation with by-pass

- Air inside home: 28°C.
- Outdoor air: 20°C.
- New air heated and blown into home: 20°C.

In addition, during summer nights, when outdoor air is colder than indoor air, the bypass is activated automatically so airflows do not cross each other.



Whole House Extract Units Single Dwellings

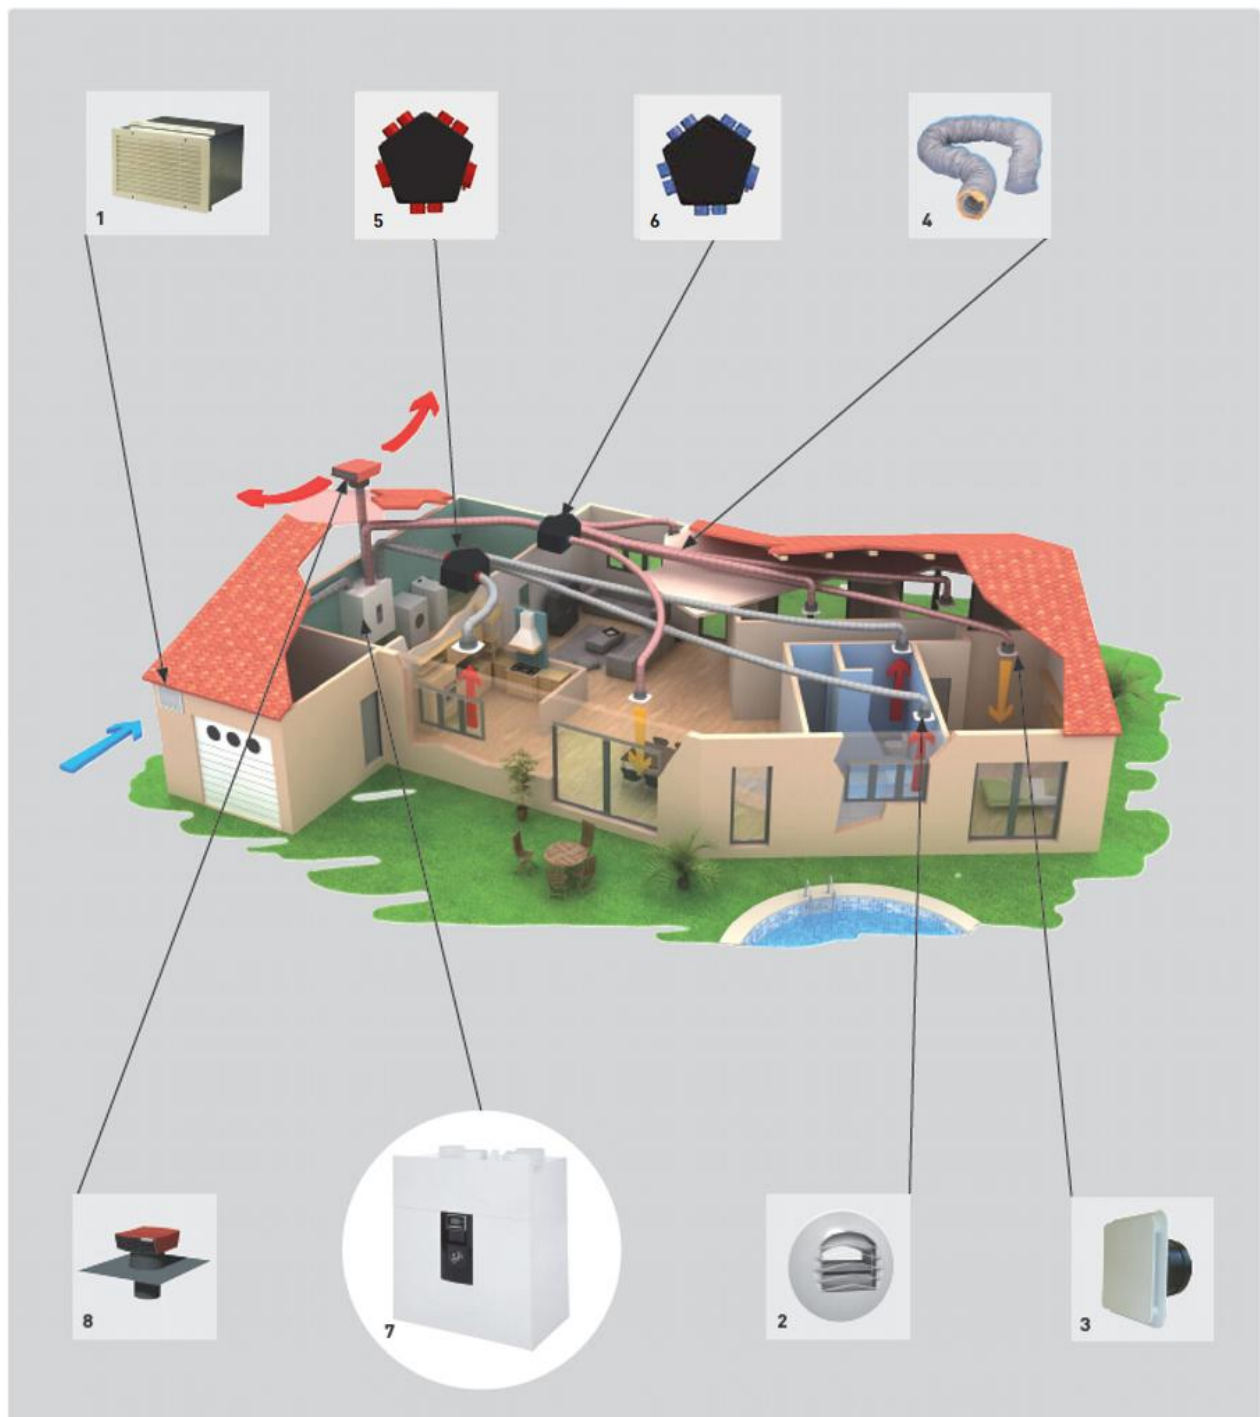

1. Air inlet grille TAP.
2. Self-adjusting extraction valve BARJ / BARP.
3. Supply and extraction (Kitchen) valve BDOP.
4. PVC or rectangular plastic ducts.
5. Extraction plenum.
6. Supply plenum.
7. IDEO2: Counter-flow, high-efficiency heat recovery unit.
8. CT Roof termination.

Control

PROGRAMMABLE CONTROL

Each IDEO includes a programmable control.



The programmable control is a remote control operated by radiofrequency. Functions:

- 3 programming modes: 2 predefined and 1 manual.
- By-pass 100% automatic or manual.
- Automatic defrost mode.
- Absence mode.

The programmable control also incorporates indicator of:

- Hour.
- Indoor / outdoor temperature.
- Change filters.
- Energy saving in KW per month.
- Ventilation speed.
- Battery level.
- Radiofrequency signal intensity.

ErP Information

Unfortunately an error occurred.