



Acoustic Cabinet Fans Self-Cleaning CVAB/T-ECOWATT Series

Serial CVAB/T-N_ECO

CVAB-2000/315 N D ECOWATT 0,21KW *230V 50/60Hz* N8

New ventilation units with improvements in tightness, robustness, ease of installation, and reparability. Ventilation units with low noise levels, made with aluminum profiles and sandwich-type panels, featuring 25 mm thick, non-flammable (M0) acoustic insulation made of fiberglass, backward-curved centrifugal impellers dynamically balanced. Brushless EC direct current motor, high efficiency, low consumption, ball bearings, built-in thermal protection, and capable of operating at temperatures from -20°C to +40°C: Single phase version 230V±10% 50/60Hz, IP44. Three phase version 400V±10% 50/60Hz, IP54. Speed fully adjustable via potentiometer located in the terminal box or via external control like the REB-ECOWATT. Analog input to control the fan with an external 0-10V signal.



Technical data


Acoustic characteristics

Unfortunately an error occurred.

Technical characteristics

Unfortunately an error occurred.

Curves

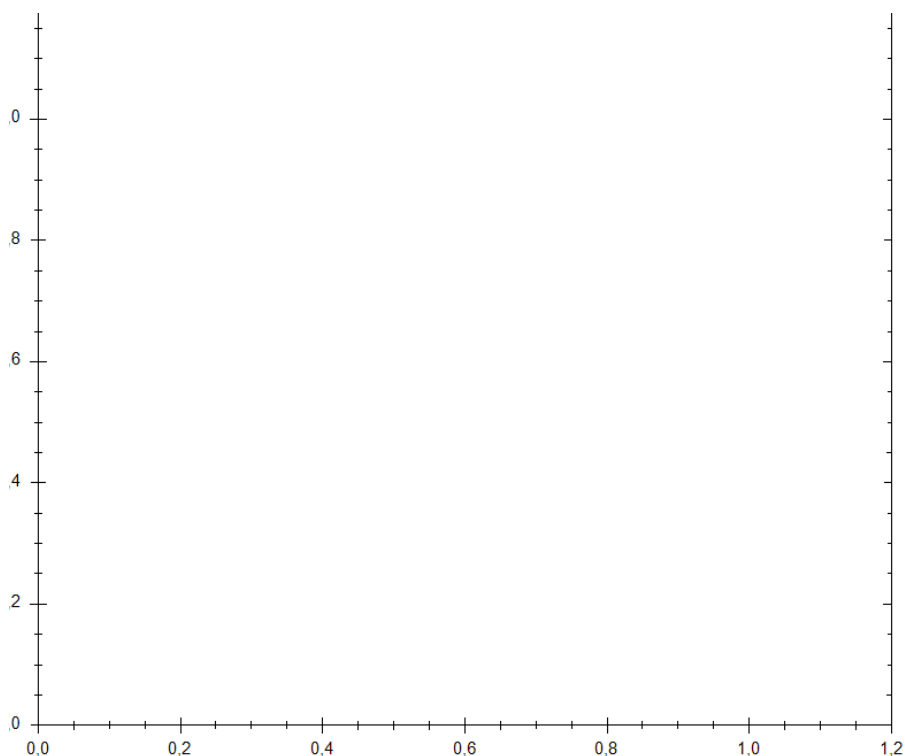

Dimensions

Unfortunately an error occurred.

ErP Information

Unfortunately an error occurred.