



**In-line mixed flow duct fans ultra-quiet  
TD-SILENT Series**

**Serial TD-SILENT**

**TD-160/100 N SILENT (230V50HZ) RE**

**Models 160 to 1000**

Low profile "Mixed-flow" fans with soundabsorbent insulation. Extremely quiet. Certified of Approval Noise Abatement Society (TD-350, TD-500, TD-800 and TD-1000 models).

Manufactured in plastic material, with a specifically designed internal skin to direct the sound waves at the right angle for them to be captured by the sound-absorbent material (1). Fitted with rubber gaskets on the inlet and outlet to absorb vibrations, a body that can be dismantled. Connection box can be rotated 360°, to facilitate easy connection of the power cable.

**Motors**

Speed controllable 230V-50Hz motor, of 2-speed or 3-speed motors (depending on the models). IP44.

Motors are class B, with ball bearings and safety thermal overload protection.

(1) Except the TD-160 SILENT, that is fitted with the special floating motor system patented by S&P.

**Additional information**

The models offer solutions to ventilation problems, especially in places where people work and low sound level is required.

**TD-SILENT-T models**

TD-SILENT versions fitted with a run-on-timer adjustable within 1 and 30 minutes and 1-speed or 3-speed motors not suitable for speed control.

**Models 1300 and 2000**

Low profile "Mixed-flow" fans with soundabsorbent insulation. Extremely quiet. Certified of Approval Noise Abatement Society (TD-2000 model). Constructed from sheet steel with epoxy polyester paint, acoustic insulation (MO) glass fibre, within outer shell. Aerodynamic inlet to improve airflow and reduce sound. Detachable fan unit without demounting duct connections. IP44. External terminal box IP55. Removeable fan body with 3 speed motor, single phase 230V-50/60Hz speed controllable, Class F, external rotor aluminium motor with capacitor and thermal protection.

**Additional information**

The models offer solutions to ventilation problems, especially in places where people work and low sound level is required.



**Technical data**

Acoustic characteristics

Hz	63	125	250	500	1k	2k	4k	8k	Overall
Inlet (Lw)	50	53	50	51	52	46	38	31	59
Inlet (LwA)	24	37	41	48	52	47	39	30	55
Inlet LpA @ 1,5m	9	22	26	33	37	32	24	15	40
Outlet (Lw)	53	58	47	53	51	44	39	32	61
Outlet (LwA)	27	42	38	50	51	45	40	31	55

Outlet LpA @ 1,5m	12	27	23	35	36	30	25	16	40
Breakout (Lw)	49	46	50	39	35	37	31	22	54
Breakout (LwA)	23	30	41	36	35	38	32	21	45
Breakout LpA @ 1,5m	8	15	26	21	20	23	17	6	30

## Technical characteristics


### Construction

Discharge diameter	100 mm
Fan size	100
Weight	1,40 kg

### Motor Characteristics

Number of poles	2
Voltage	1-230V-50Hz
Maximum absorbed current	0,2 A
IP Rating	IP44
Motor insulation class	B

## Curves

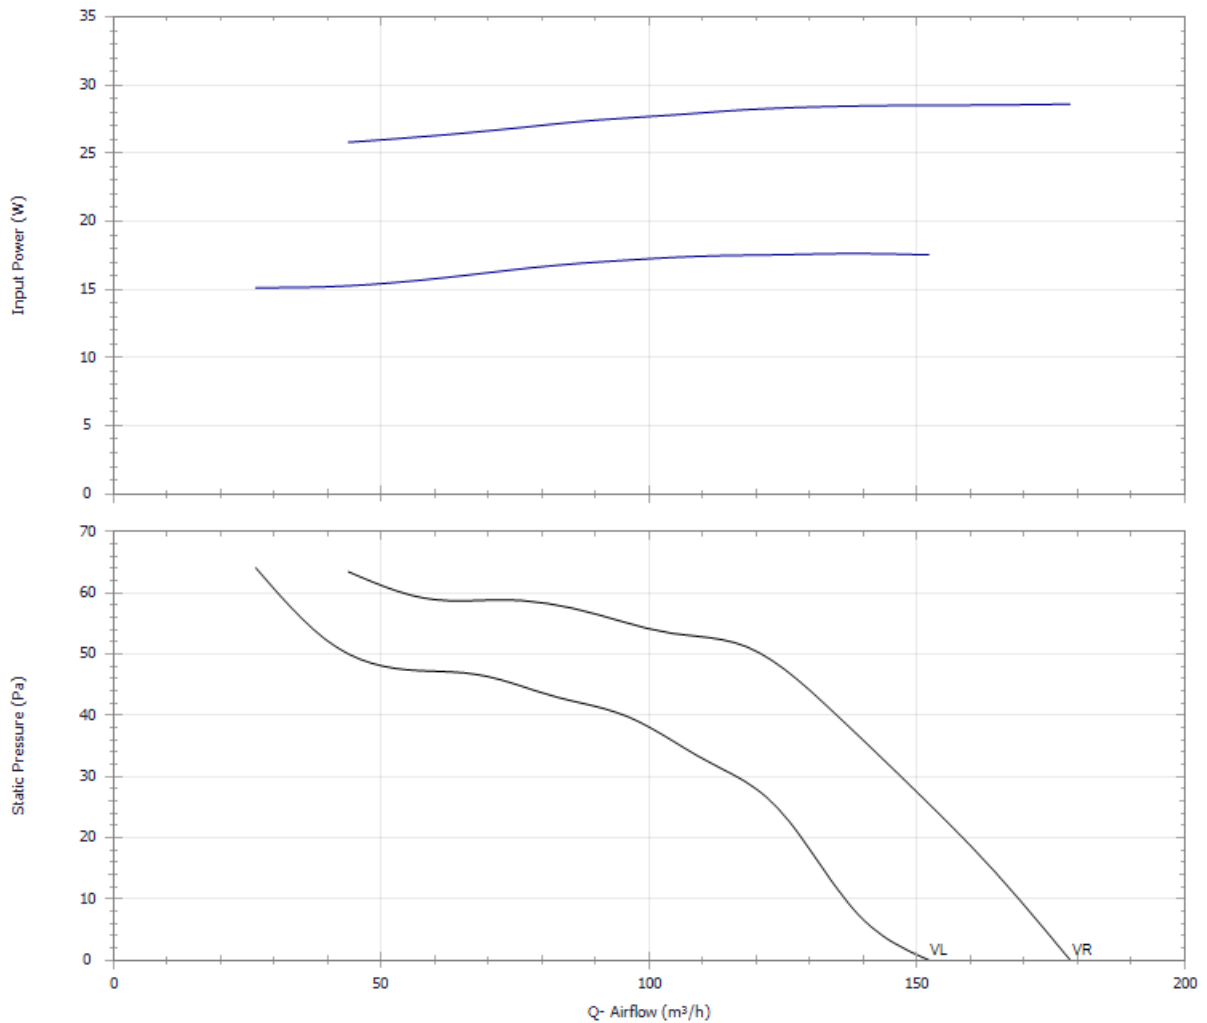

## Dimensions

A
232

## ErP Information

Ecodesign	
Commission regulation (EU) N°1253/2014 of July 2014	
Information requirements (Annex V)	
ProductoComercial	TD-160/100 N SILENT (220-240V50HZ) RE
Identifier	5211318000
SEC average climate (kWh/(m2.an))	-11,14
SEC class	NA
SEC cold climate (kWh/(m2.an))	-28
SEC warm climate (kWh/(m2.an))	-2
Typology	RVU unidirectional
Type of drive	2-speed
Type of HRC	None
Thermal efficiency (%)	0
Maximum flow rate (m3/h)	125
Electrical power input at maximum flow rate (W)	27,72
Sound power level (LWA)	43
Reference flow rate (m3/s)	0,0245
Reference pressure difference (Pa)	41,49
SPI (W/m3/h)	0,192
Control factor	1
Control typology	Manual
Maximum internal leakage for BVU (%)	Not applicable
Maximum external leakage for BVU and UVU (%)	5
Mixing rate for BVU without duct connection (%)	Not applicable
Position of visual filter warning	Not applicable
description of visual filter warning	Not applicable
Instructions to install supply grilles	F&W Leaflet
Instructions to install exhaust grilles	F&W Leaflet
<b>www.solerpalau.com</b>	
Airflow sensitivity to pressure variation	Not applicable
Indoor/outdoor air tightness (m3/h)	Not applicable
Annual electricity consumption - Average climate	240,5
Annual electricity consumption - Warm climate	240,5
Annual electricity consumption - Cold climate	240,5
Annual heating saved - Average climate (kWh/a)	17,15
Annual heating saved - Warm climate (kWh/a)	7,76
Annual heating saved - Cold climate (kWh/a)	33,55