



CENTRIFUGAL FANS FOR FURNACE APPLICATIONS CFMT-N Series

Serial CFMT

CFMT/4-355/145 3KW (230/400V50HZ)LG VE

Single inlet direct-drive centrifugal fan with forward-curved impeller.
Insulation panel is manufactured from galvanized sheet steel with internal thermal insulation of mineral fiber.
Standard orientation: LG
Motor: 4 pole, IP55, Class F, 400/690V 50Hz 3 phase (except 3 kW motor - 230/400V 50Hz)
Continuous operation with air stream up to 250°C.
Application: hot air recirculation in furnace.

Additional information

Scroll with inlet supplied as an accessory.

On request Fan supplied in RD position. Different voltages. 60

Hz. Stainless steel construction AISI-304 / AISI-316 (except impeller only available in AISI-304)



Technical data


Acoustic characteristics

Unfortunately an error occurred.

Technical characteristics

Unfortunately an error occurred.

Curves

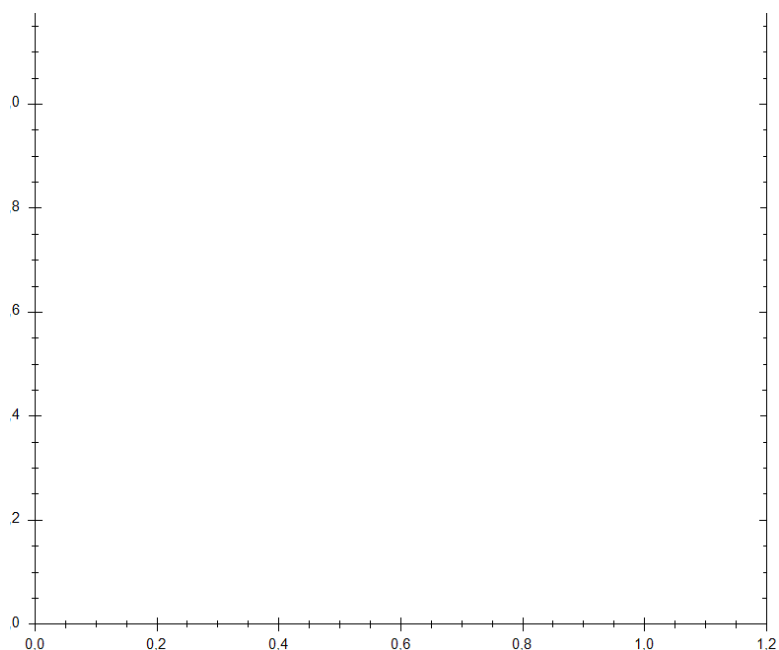

Dimensions

Unfortunately an error occurred.

ErP Information

Unfortunately an error occurred.