



## Acoustic cabinet fans CHAT-N Series

### Serial CHAT-N

#### CHAT/4 630 N 3,0KW IE3 \*230/400V 50\* F400 VE

Range of direct driven backward curved centrifugal cabinet fans designed for smoke extraction in fire conditions and certified F400-120 (CE marked). The casings are manufactured from a robust galvanised frame work combined with panels lined with 25 mm thickness of fireproof fibreglass acoustic insulation (M0). All models incorporate F400-120 rated motors approved to operate continuously (S1) and in emergency situations (S2).  
Available, depending upon the model, with three phase motors in 4, 6 or 4/8 poles.  
All the motors are IP55 Class H insulation. Electrical supply.  
Three phase 230/400V-50Hz up to 3kW.  
Three phase 400-50Hz, for higher power motors and two speed motors.



### Technical data


#### Acoustic characteristics

Unfortunately an error occurred.

#### Technical characteristics

Unfortunately an error occurred.

#### Curves

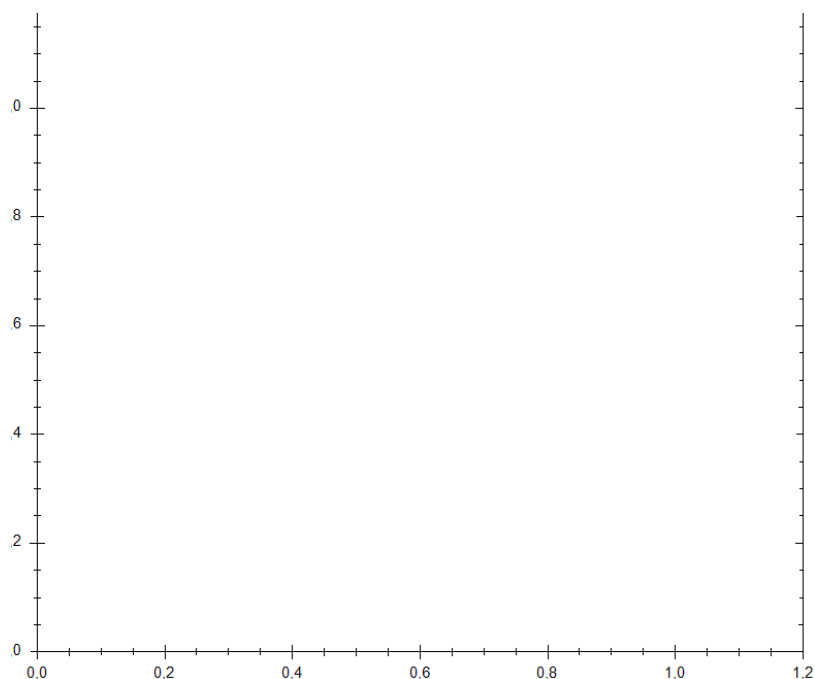


## Dimensions

Unfortunately an error occurred.

---

## Fitting

### Versatile design

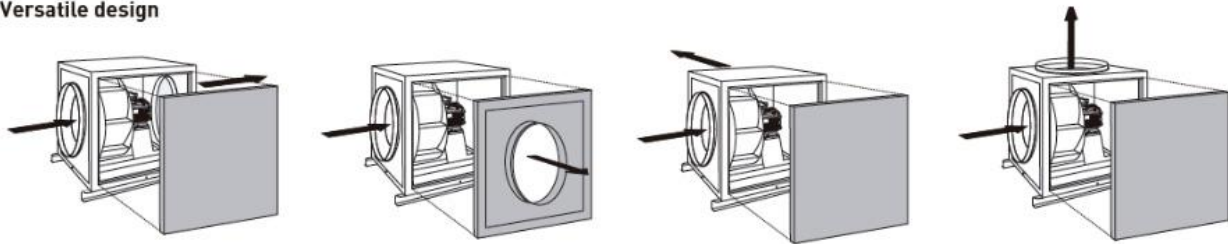

## ErP Information

Unfortunately an error occurred.