



Air curtains COR-NW Series


Serial COR-NW

COR-1500 NW 15

Wall mounted Air Curtains, with water heating coil, to install in commercial and industrial applications.

Characteristics

Can be fitted up to a height of 3 metres.
Tangential, high efficiency impeller with low noise level.
Possibility of installing several units in series.



Technical data


Technical characteristics

Model	Voltage (50 Hz) (V)	Heat power (kW)*	Motor power (W)	Speeds	Airflow (m³/h)			Air output speed at 0,05 m	Maximum ΔT** (°C)			Sound pressure level (dB(A))	Absorbed current (A)	Water flow (l/s)	Threaded water connection	Ambient / Hot air	Weight (kg)	Colour
					Speed				Speed									
					High	Medium	Low		High	Medium	Low							
COR-1000 NW 9	230	10	115	3	1.600	1.000	800	11	18	21	24	48	0,5	0,12	1/2"	A/H	19	White RAL 9003
COR-1500 NW 15	230	16,4	180	3	2.800	1.900	1.400	11	19	22	24	50	0,8	0,20	1/2"	A/H	25	White RAL 9003
COR-2000 NW 24	230	21,9	160	3	3.300	2.200	1.700	8	20	23	25	48	0,7	0,30	1/2"	A/H	33	White RAL 9003

* Values under the following conditions: water temperature 80°C/60°C, maximum speed; air inlet temperature +15°C.


** Values under the following conditions: water temperature 80°C/60°C, air inlet temperature +15°C.

Dimensions

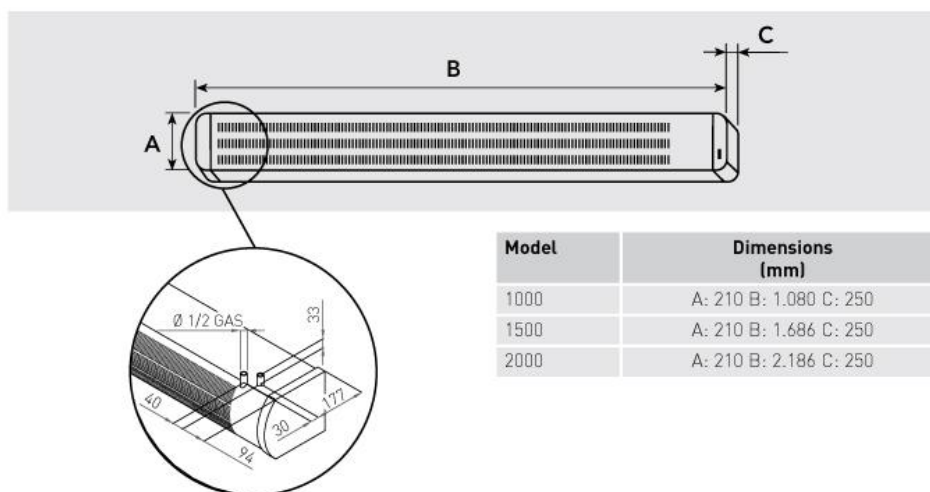


Model	Dimensions (mm)
1000	A: 210 B: 1.080 C: 250
1500	A: 210 B: 1.686 C: 250
2000	A: 210 B: 2.186 C: 250

Application



Air distance/speed

Installation

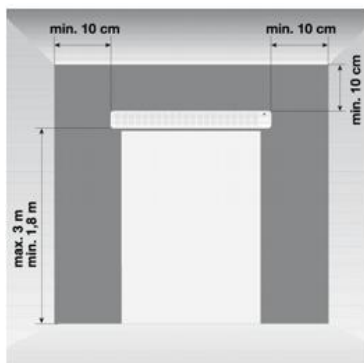

Installation height