



Acoustic cabinet fans CHAT-N Series

Serial CHAT-N

CHAT/4 560 N 1,5KW IE3 *230/400V 50* F400 VE

Range of direct driven backward curved centrifugal cabinet fans designed for smoke extraction in fire conditions and certified F400-120 (CE marked). The casings are manufactured from a robust galvanised frame work combined with panels lined with 25 mm thickness of fireproof fibreglass acoustic insulation (M0). All models incorporate F400-120 rated motors approved to operate continuously (S1) and in emergency situations (S2).
Available, depending upon the model, with three phase motors in 4, 6 or 4/8 poles.
All the motors are IP55 Class H insulation. Electrical supply.
Three phase 230/400V-50Hz up to 3kW.
Three phase 400-50Hz, for higher power motors and two speed motors.



Technical data


Acoustic characteristics

Unfortunately an error occurred.

Technical characteristics

Unfortunately an error occurred.

Curves

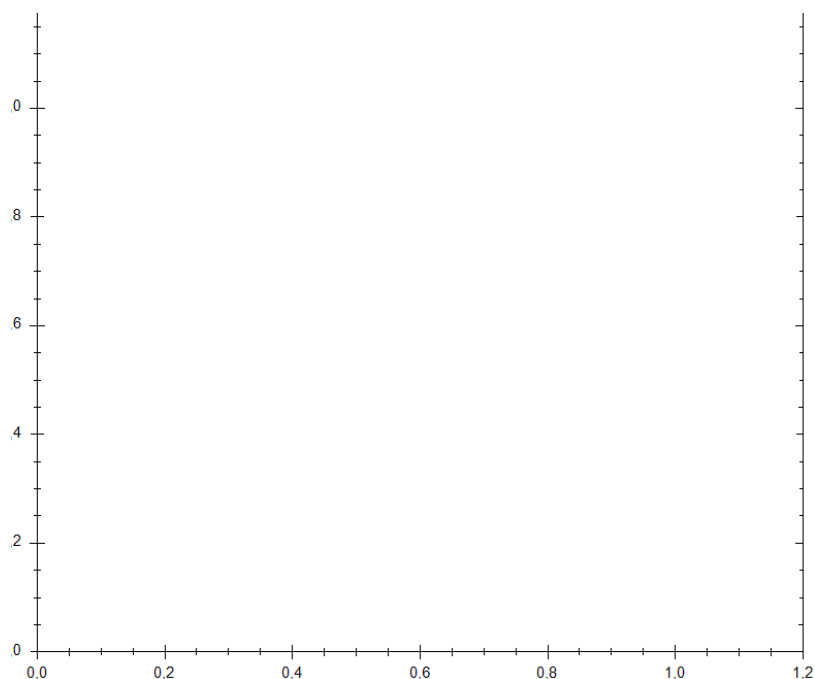


Dimensions

Unfortunately an error occurred.

Fitting

Versatile design

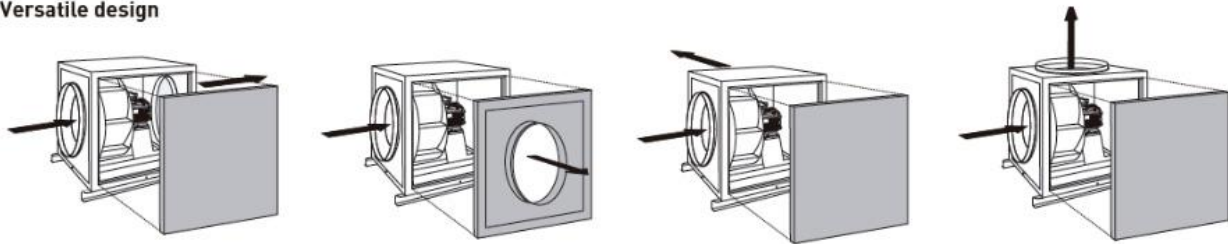

ErP Information

Unfortunately an error occurred.