



## Industrial air curtains COR-IND M Series

### Serial COR-IND M

#### COR-IND M 1000/12

Designed for wall application in commercial or industrial environments.

#### Characteristics

Can be fitted up to a height of 5 metres.

High performance tangential impeller giving a low noise level.

Can be installed in series.

Available in ambient or ambient and hot air versions.



## Technical data


### Technical characteristics

Model	Voltage (50 Hz) (V)	Heat power (kW)	Motor power (W)	Speeds	Airflow (m³/h)		Output speed* at 0,05 m (m/s)	Maximum ΔT (°C)				Sound pressure level** (dB(A))	Abs. current (A)	Ambient thermostat connection	Thermal fuse	Ambient / Hot air	Weight (kg)	Colour
					Speed			Max. Power		Min. Power								
					High	Low		High speed	Low speed	High speed	Low speed							
COR-IND M 1000 F	230		267	2	3.400	3.000	13					55	1,2			A	40	White RAL 9003
COR-IND M 1500 F	230		381	2	4.800	4.100	14					59	1,76			A	50	White RAL 9003
COR-IND M 1000/12	3N 400	6 / 12	245	2	3.200	2.500	12	11	14	5	7	55	17,3	•	•	A/H	45	White RAL 9003
COR-IND M 1500/18	3N 400	9 / 18	348	2	5.000	4.400	19	11	12	5	6	59	26	•	•	A/H	45	White RAL 9003


\* Maximum airflow.

\*\* Measured at 5 meters, in free field.


## Dimensions

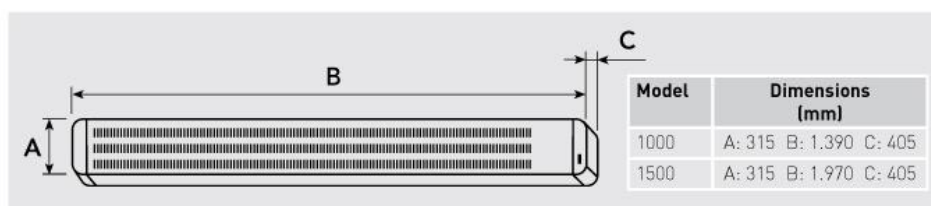

## Application



## Installation



**Installation height**