



Industrial air curtains COR-IND M Series

Serial COR-IND M

COR-IND M 1000 F

Designed for wall application in commercial or industrial environments.

Characteristics

Can be fitted up to a height of 5 metres.

High performance tangential impeller giving a low noise level.

Can be installed in series.

Available in ambient or ambient and hot air versions.



Technical data


Technical characteristics

Model	Voltage (50 Hz) (V)	Heat power (kW)	Motor power (W)	Speeds	Airflow (m³/h)		Output speed* at 0,05 m (m/s)	Maximum ΔT (°C)				Sound pressure level** (dB(A))	Abs. current (A)	Ambient thermostat connection	Thermal fuse	Ambient / Hot air	Weight (kg)	Colour
					Speed			Max. Power		Min. Power								
					High	Low		High speed	Low speed	High speed	Low speed							
COR-IND M 1000 F	230		267	2	3.400	3.000	13					55	1,2			A	40	White RAL 9003
COR-IND M 1500 F	230		381	2	4.800	4.100	14					59	1,76			A	50	White RAL 9003
COR-IND M 1000/12	3N 400	6 / 12	245	2	3.200	2.500	12	11	14	5	7	55	17,3	•	•	A/H	45	White RAL 9003
COR-IND M 1500/18	3N 400	9 / 18	348	2	5.000	4.400	19	11	12	5	6	59	26	•	•	A/H	45	White RAL 9003


* Maximum airflow.

** Measured at 5 meters, in free field.


Dimensions

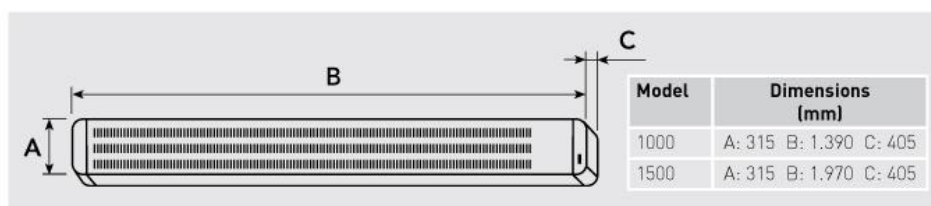

Application



Installation



Installation height